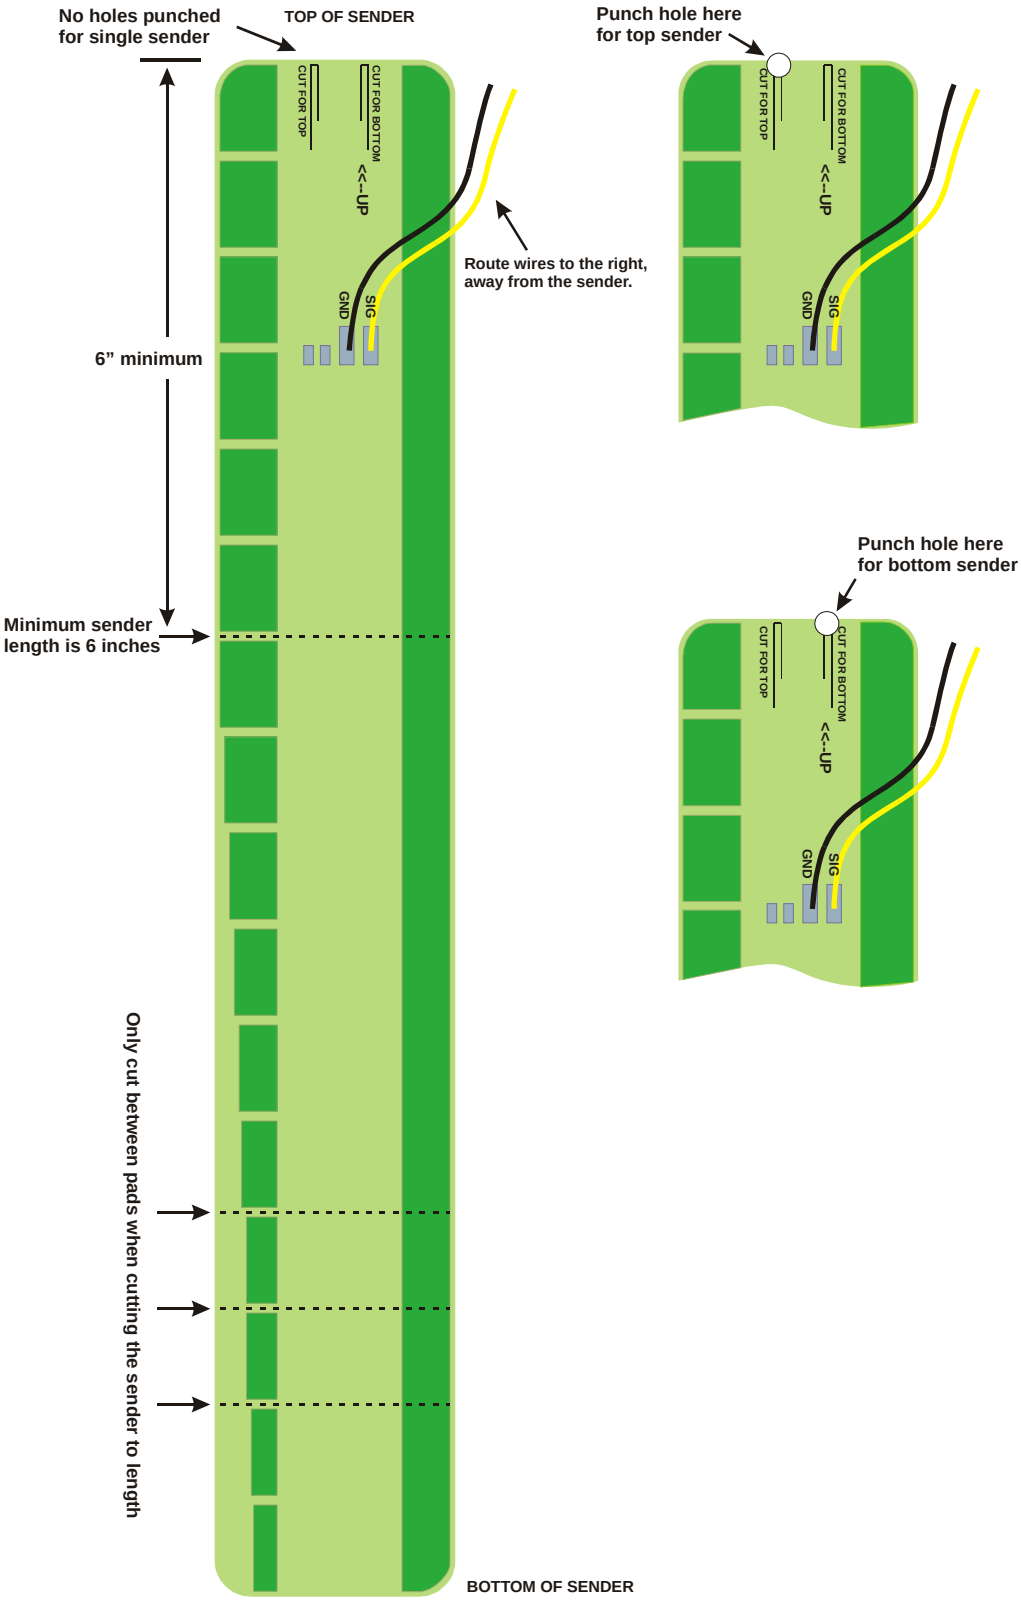
No holes punched for single sender
TOP OF SENDER
CUT FOR TOP
CUT FOR BOTTOM
<<--UP
GND
SIG
Route wires to the right, away from the sender.
6” minimum
Minimum sender length is 6 inches
Only cut between pads when cutting the sender to length
BOTTOM OF SENDER
Punch hole here for top sender
CUT FOR TOP
CUT FOR BOTTOM
<<--UP
GND
SIG
Punch hole here for bottom sender
CUT FOR TOP
CUT FOR BOTTOM
<<--UP
GND
SIG

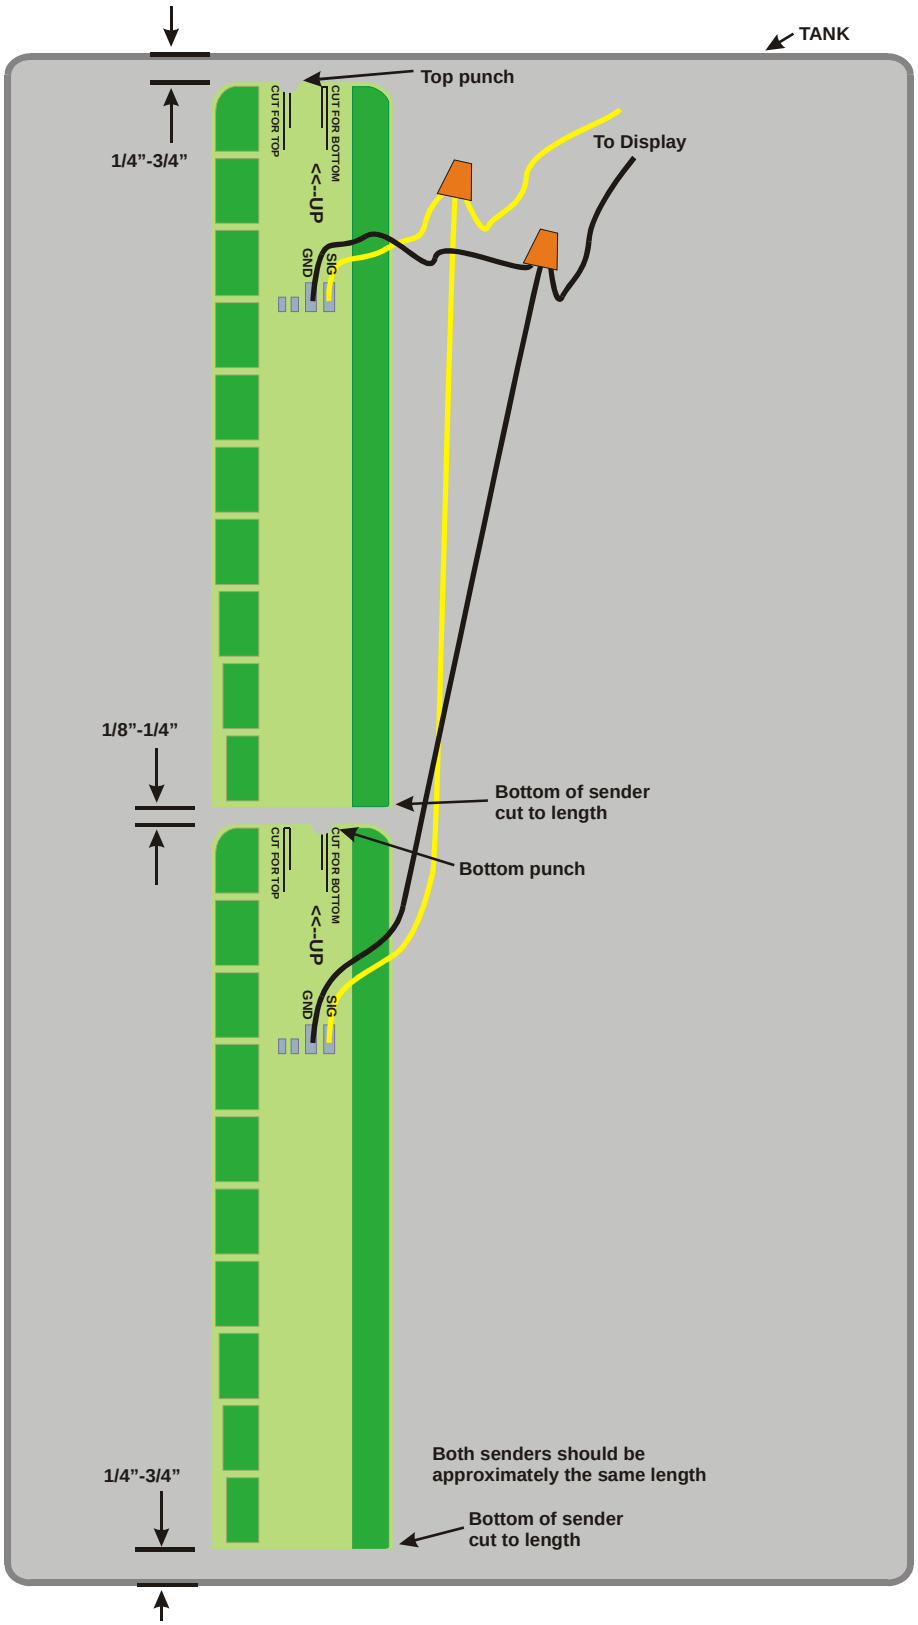

Typical Two Stacked Sender Installation